

GEDA® MULTILIFT P6

**Compact, pre-installed
base unit comprising:
car, enclosure, flat cable
bin and drive**

GEDA UNI-X-MAST system

No foundations required

Modular system

**Fast and safe assembly
directly from the car**

**Automatic lubrication
device as a standard**

**Break-off safety for flat
cable as a standard**





GEDA MULTILIFT P6

The passenger and material hoists from the Multilift range offer the right hoist solution for virtually any construction site application, thanks to the modular system and unique features.


The “smallest” in the range, the GEDA Multilift P6, offers an impressive load capacity for 650 kg or six passengers. The lifting speed is 24 m/min with a maximum lifting height of 100 m.

Installation and dismantling of the Multilift P6 is fast and, above all, safe. The complete base unit, consisting of the car, enclosure, flat cable bin and drive, is delivered as one unit – with perfect dimensions for container loading and HGV transport. Foundations are not necessary. The device can then be set up on-site immediately – for optimum logistics from the outset. With the integrated roof hatch and the assembly guard flap inside the hoist, the device can be easily assembled and disassembled from the platform.

Technical data:

	650 kg 6 persons
	100 m
	12/24 m/min
	3.0/6.1 kW/400 V/ 50 Hz/16 A

Platform:

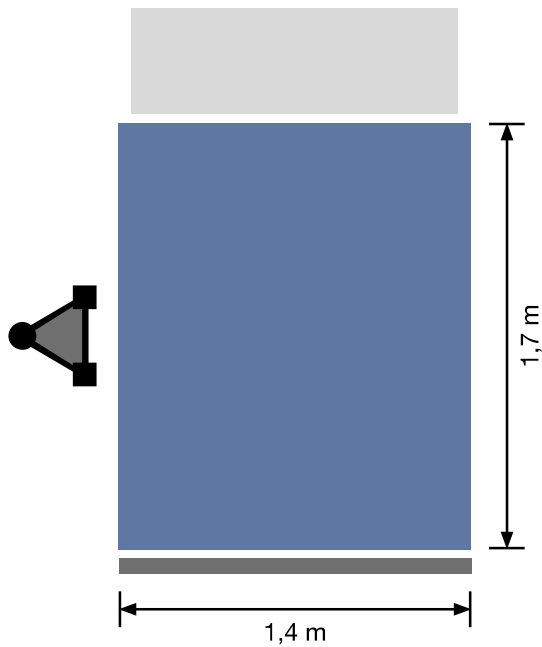

GEDA MULTILIFT P6

1 loading sliding door / 1 unloading ramp

Recommended landing level safety gates:



Comfort

Art. No. 01212



VARIO LITE

Art. No. 68200



VARIO/VARIO +

Art. No. 68000;68050



High and closed 1.8 m/2.1 m

Art. No. 41442;41441

Accessories:

For a wide range of
accessories visit:
www.geda.de



Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68301	Comfort incl. sheet metal panel
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel